





Alloy cast steel Fast connector sockets with pin

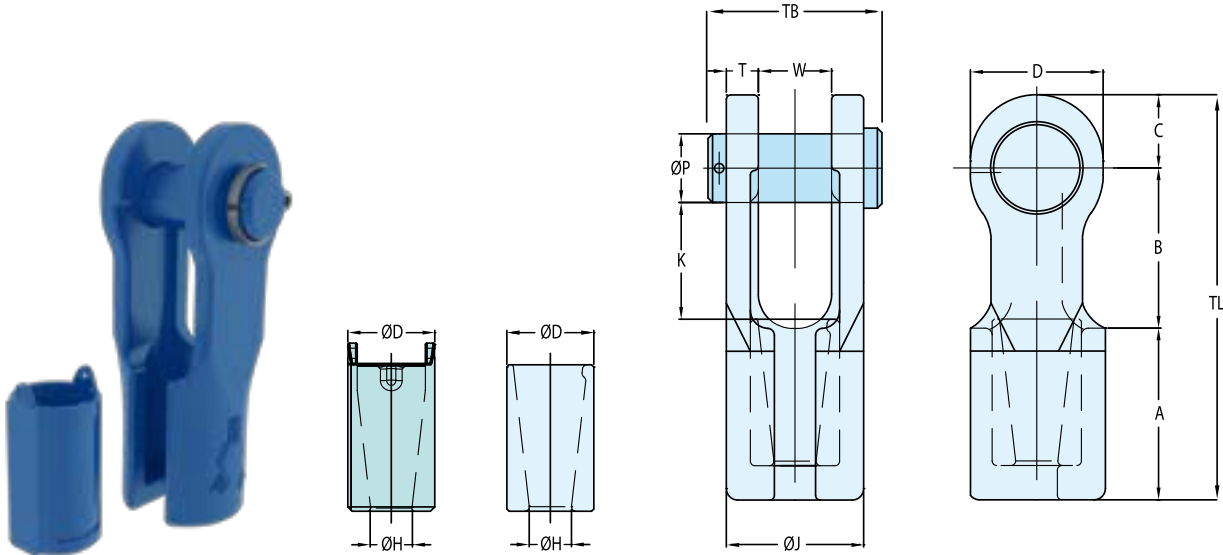

Model nr.	MBL (Mtons)	for wire Ø		Dimensions (mm)													Weight (kg)
		mm	inch	A	B	C	ØH	ØP	T	W	D	ØD	ØJ	K	TB	TL	
FCS 701 P	20	11 - 13	$\frac{7}{16} - \frac{1}{2}$	62	61	27	15	25	12	25	50	33	49	46	67	150	1.6
FCS 702 P	25	13 - 16	$\frac{1}{2} - \frac{5}{8}$	72	78	32	18	30	14	32	58	38	60	59	85	182	2.6
FCS 703 P	40	16 - 19	$\frac{5}{8} - \frac{3}{4}$	85	93	40	21	35	16	38	70	45	70	69	95	218	4.5
FCS 704 P	55	20 - 22	$\frac{7}{8}$	102	106	45	24	41	19	44	80	50	82	81	110	253	6.5
FCS 705 P	75	23 - 26	1	115	123	60	28	51	22	51	104	60	95	90	128	298	11
FCS 706 P	90	27 - 29	$1\frac{1}{8}$	140	152	65	32	57	25	57	114	70	107	116	142	357	16

Spin Resistant Connector

FCS 705 P.SR	75	23 - 26	1	115	123	60	28	51	22	51	104	60	95	90	128	298	11
FCS 706 P.SR	90	27 - 29	$1\frac{1}{8}$	140	152	65	32	57	25	57	114	70	107	116	142	357	16
FCS 707 P.SR	125	30 - 32	$1\frac{1}{4}$	150	159	73	36	63	28	63	126	80	119	120	155	382	18
FCS 708 P.SR	125	33 - 36	$1\frac{3}{8}$	160	171	73	39	64	28	69	126	85	125	130	160	404	23
FCS 709 P.SR	150	37 - 39	$1\frac{1}{2}$	176	187	80	42	70	30	76	142	90	136	142	177	443	29
FCS 710 P.SR	170	40 - 42	$1\frac{5}{8}$	188	198	88	45	76	33	76	156	95	142	150	187	474	36




Special reeving tool available on request

MBL = Minimum Breaking Load.

Our standard sockets are delivered in blue colour paint. Hot dipped galvanized is also available. All sockets can be provided with Declaration of compliance according EN 10204-2.1, Material certificate according EN 10204-3.1 and EC Declaration according machine directive 98/37/EC.


Alloy cast steel Fast connector sockets with bolt and nut

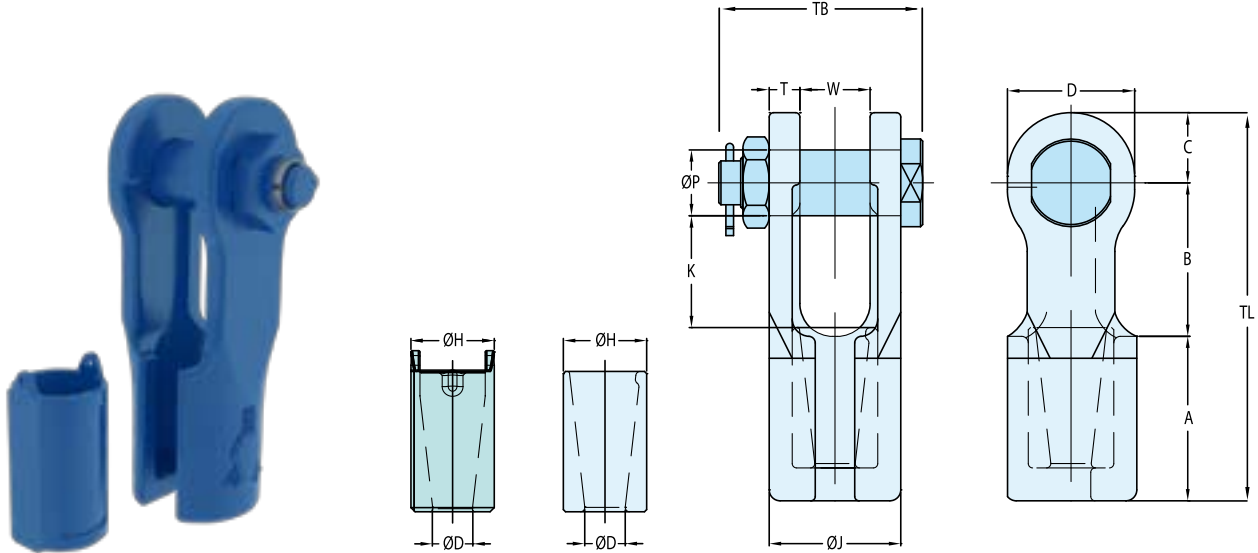

Model nr.	MBL (Mtons)	for wire Ø		Dimensions (mm)													Weight (kg)
		mm	inch	A	B	C	ØH	ØP	T	W	D	ØD	ØJ	K	TB	TL	
FCS 701 B	20	11 - 13	$\frac{7}{16} - \frac{1}{2}$	62	61	27	15	25	12	25	50	33	49	46	80	150	1.6
FCS 702 B	25	13 - 16	$\frac{1}{2} - \frac{5}{8}$	72	78	32	18	30	14	32	58	38	60	59	96	182	2.6
FCS 703 B	40	16 - 19	$\frac{5}{8} - \frac{3}{4}$	85	93	40	21	35	16	38	70	45	70	69	107	218	4.5
FCS 704 B	55	20 - 22	$\frac{7}{8}$	102	106	45	24	41	19	44	80	50	82	81	123	253	6.5
FCS 705 B	75	23 - 26	1	115	123	60	28	51	22	51	104	60	95	90	138	298	11
FCS 706 B	90	27 - 29	$1\frac{1}{8}$	140	152	65	32	57	25	57	114	70	107	116	160	357	16

Spin Resistant Connector

FCS 705 B.SR	75	23 - 26	1	115	123	60	28	51	22	51	104	60	95	90	138	298	11
FCS 706 B.SR	90	27 - 29	$1\frac{1}{8}$	140	152	65	32	57	25	57	114	70	107	116	160	357	16
FCS 707 B.SR	125	30 - 32	$1\frac{1}{4}$	150	159	73	36	63	28	63	126	80	119	120	165	382	18
FCS 708 B.SR	125	33 - 36	$1\frac{3}{8}$	160	171	73	39	64	28	69	126	85	125	130	185	404	23
FCS 709 B.SR	150	37 - 39	$1\frac{1}{2}$	176	187	80	42	70	30	76	142	90	136	142	201	443	29
FCS 710 B.SR	170	40 - 42	$1\frac{5}{8}$	188	198	88	45	76	33	76	156	95	142	150	209	474	36



Special reeving tool available on request

MBL = Minimum Breaking Load.

Our standard sockets are delivered in blue colour paint. Hot dipped galvanized is also available. All sockets can be provided with Declaration of compliance according EN 10204-2.1, Material certificate according EN 10204-3.1 and EC Declaration according machine directive 98/37/EC.